

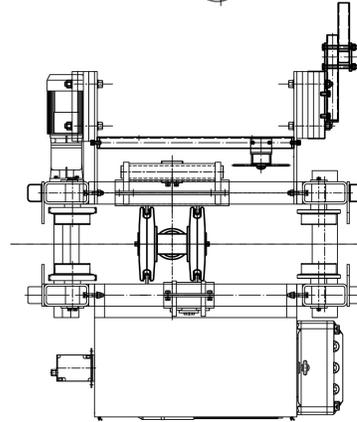
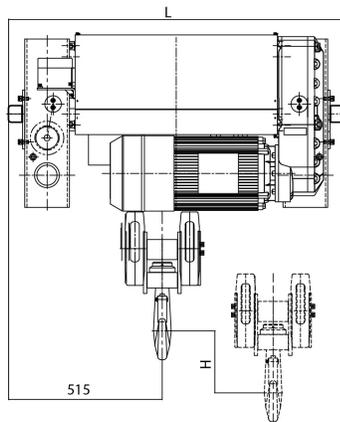


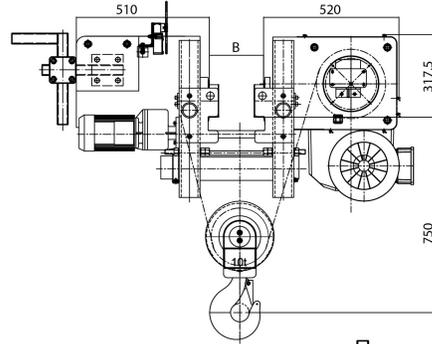

## Tecle Polipasto Prowinch c/carro electrico Monoviga 6.3 Tons trifasico

### Especificaciones Técnicas

Capacidad de Carga	6000 kg / 13 889 lb	Altura de Izaje Estandar (Customizable)	40 ft / 12 m
Velocidad /min	2.62 - 16.4 ft/min / 0.8 - 5 m /min	Numero de Velocidades	2 Speed
Voltaje	3 Phase 208~240/480V 50/60Hz	Clase de Servicio	H4/M5/2m/Class D
Tipo de Motor	Squirrel Cage Induction Motor	AMP Motor	12.7 A (@ 380v)
RPM Motor	2930 / 470 rpm (@50hz)	Freno Motor	Sew Eurodrive BE5 Electromagnetic Release Brake >125%
Grado de Aislacion	F	Protección IEC Motor	IP55
Protección Tablero de Control	IP65	Freno Dinámico	Included
Control	Pendant Control and Remote Control Telecontrol F24-6D	Voltaje del Control	48V
Marca Motor de Izaje	Sew Eurodrive DRS132M12	Reductor de Izaje	Sew Eurodrive G77
Tipo Transmisión / Reductor	Sew Eurodrive G77	Relación de Transmisión	87.32
Cable	Ø 8.8 mm K19S IWRC 2160	Humedad	<85%
Temperatura	-4°~104° F / -20°~40° C	Reductor Carro	SEW Eurodrive RF17
Motor Carro	SEW Eurodrive DRN71M4	Potencia del Trolley	0.37 ~ 0.64 kW
Nivel de Ruido	82 dB	Velocidad del Trolley /min	16 ~ 65 ft/min. / 5 ~ 20 m/min
Cantidad de Velocidades	2	Rango de ancho de la Viga	7.9~13.7 in / 200~350 mm
Normas	ASME HST-4 , ASME B30.16 , B30.17 , EN14492-2 , EN60204-32	Garantía	3 Year
Hoist Contactor Brand	Schneider or EATON		

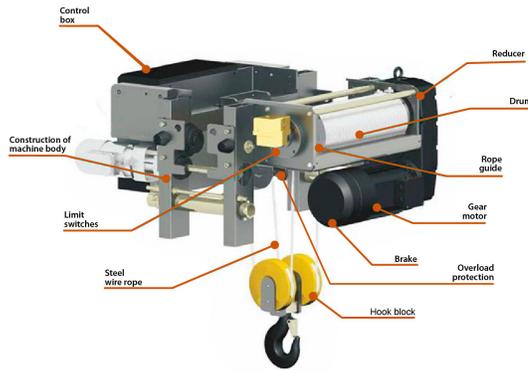

**DRIVE TECHNOLOGY**

SEW Eurodrive high performance Motor, reducer and brake. Compact design, light weight, low energy consumption, low noise and eco-friendly design. Electromagnetic brake disc (Asbestos-free). Long Service life and easy maintenance.



**OVERLOAD PROTECTION**

Load Cell connected to a Limit Relay (Adjustable) to avoid overloading of the hoist.



**WIRE ROPE GUIDE**

Helps the winding of the rope on the drum. Light weight and highly resistance. Design to reduce friction on the wire rope and avoid premature wear.



**HIGH-PERFORMANCE WIRE ROPES**

High-performance wire rope with tensile strength up to 2160Mpa. Galvanized surface and high flexibility to ensure long service life.




**DRUM**

Q345 steel, seamless grooved drum. Design to fulfill FEM and ASME standards and ensure a safe operation.



**LIMIT SWITCHES**

High precision adjustable height limit switches, for all movements of hoist and trolley.



**LIFTING HOOK GROUP**

DIN standard lifting hook with safety clasp. Forged by the high-strength material of T grade.



**CONTROL BOX**

Electric Control box with Schneider Inverter, Eaton contactors and components. Compact design, easy access, IP65 Enclosure.

## Detalles del Empaque

<b>H Altura Muerta</b>	23.46
<b>A Altura Total</b>	33.31
<b>X Diametro Rueda</b>	3.94

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso